


SL 05 (50Hz)

No. of vanes 7	Capacity 0,3-1,5 m ³ /h
Outlet connection diameter (inside threaded) 1 ¼"	Delivery head 234 - 52 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

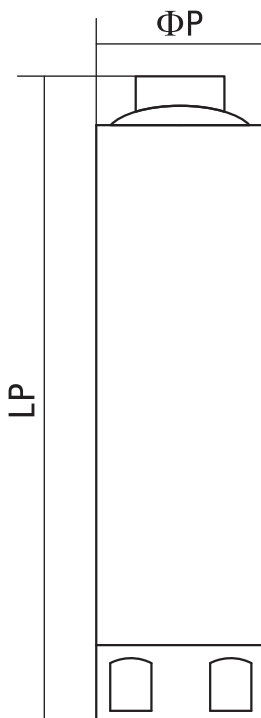

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



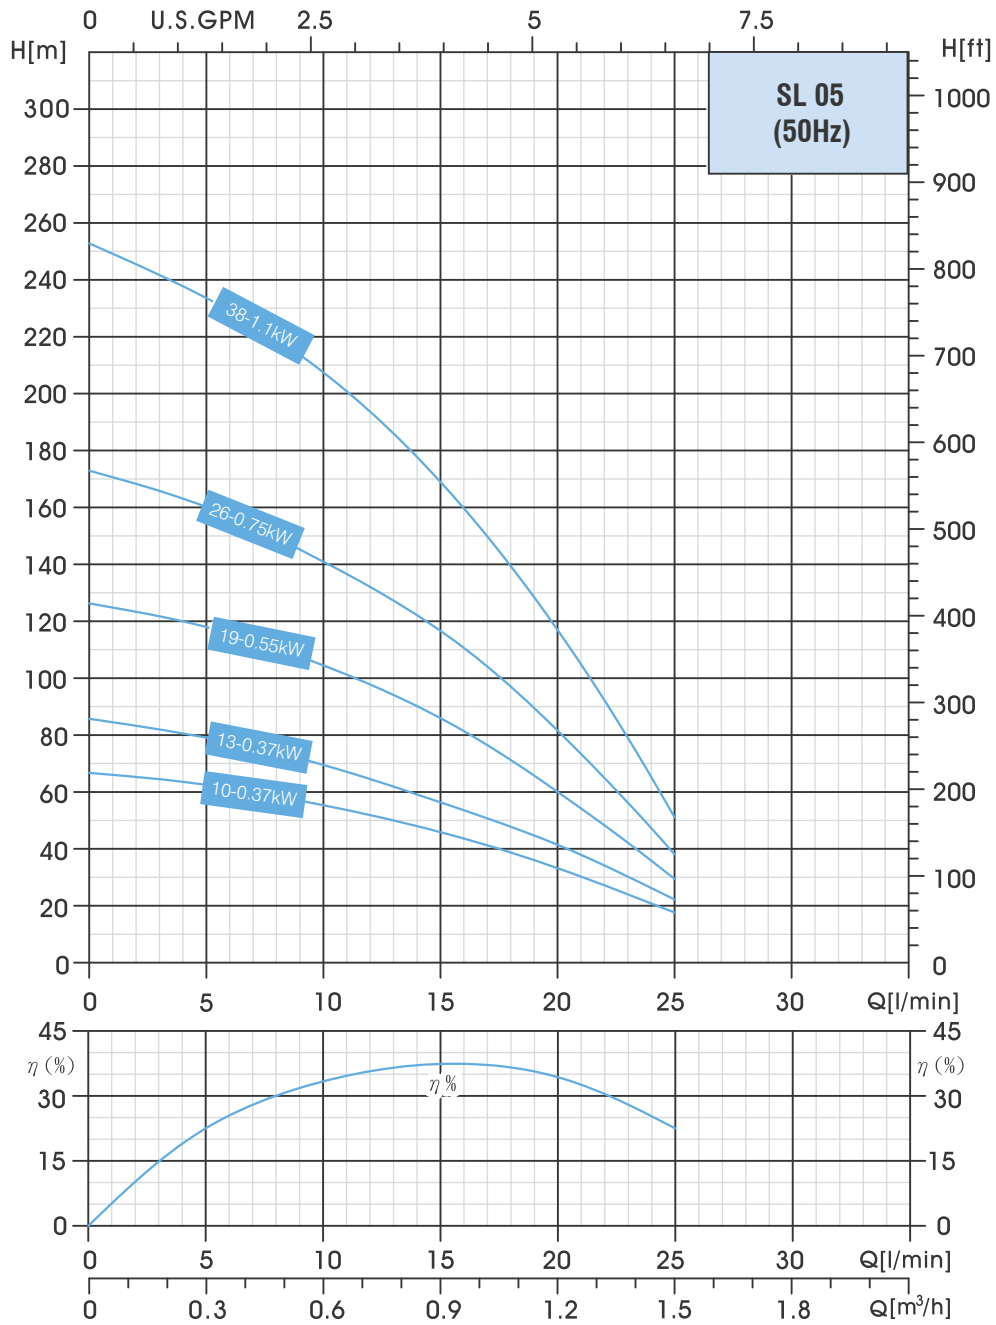

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h	0	0.3	0.6	0.9	1.2	1.5
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg							
SL 05-10	10	4"	0.37	0.50	324	1.25"	3.3	Head (m)	67	63	55	46	33	18
SL 05-13	13	4"	0.37	0.50	377	1.25"	3.7		86	78	70	56	42	23
SL 05-19	19	4"	0.55	0.75	481	1.25"	4.7		126	118	105	86	60	30
SL 05-26	26	4"	0.75	1.00	642	1.25"	5.8		173	160	141	117	81	39
SL 05-38	38	4"	1.10	1.50	864	1.25"	8.2		253	234	208	169	117	52