


SL 25 (50Hz)

No. of vanes 7	Capacity 3,6-6,6 m ³ /h
Outlet connection diameter (inside threaded) 1 ¼"	Delivery head 230 - 94 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

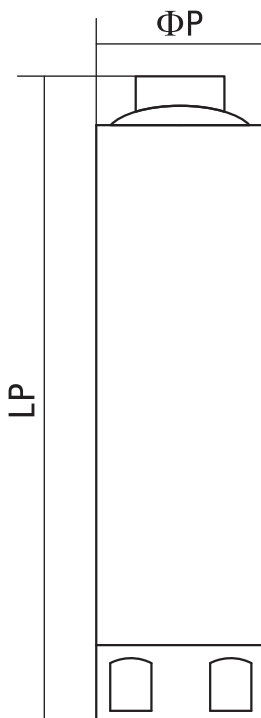

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



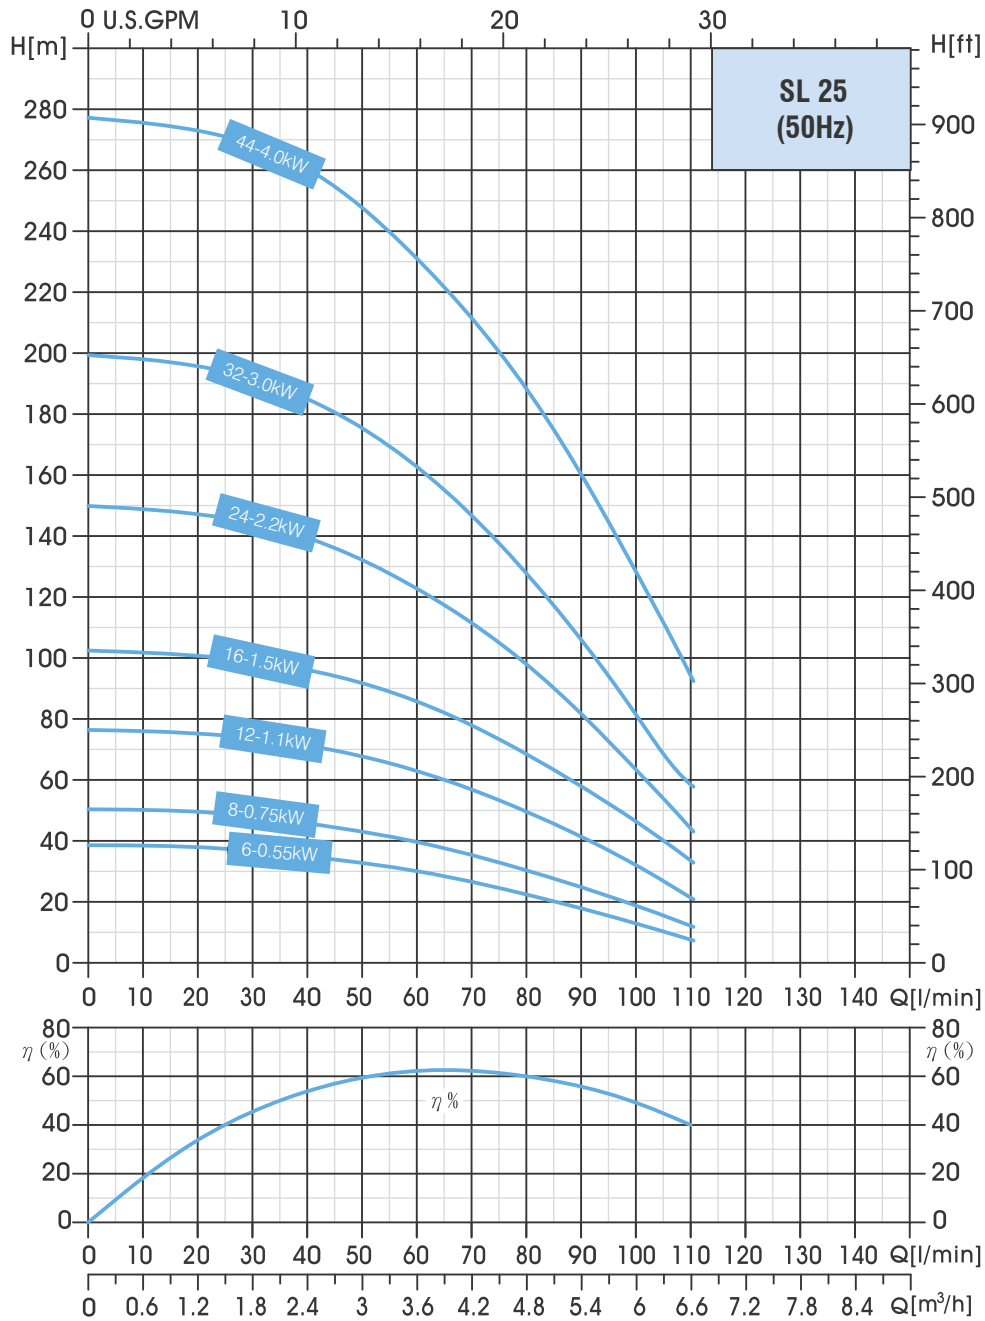

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h						
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-6	6	4"	0.55	0.75	296	1.25"	2.9	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-8	8	4"	0.75	1.00	345	1.25"	3.3	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-12	12	4"	1.10	1.50	433	1.25"	4.1	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-16	16	4"	1.50	2.00	542	1.25"	5.0	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-24	24	4"	2.20	3.00	777	1.25"	6.6	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-32	32	4"	3.00	4.00	965	1.25"	8.7	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-44	44	4"	4.00	5.50	1.296	1.25"	11.2	0	3.6	4.2	4.8	5.4	6.0	6.6