


SL 60 (50Hz)

| | | | |
|--|--------------|---|---------------------------------|
| No. of vanes | 6 | Capacity | 9,6-15,6 m³/h |
| Outlet connection diameter (inside threaded) 2" | | Delivery head | 155 - 67 mt |
| Pump outside diameter | 95 mm | Shaft diameter (Hexagonal) 11 mm | |




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

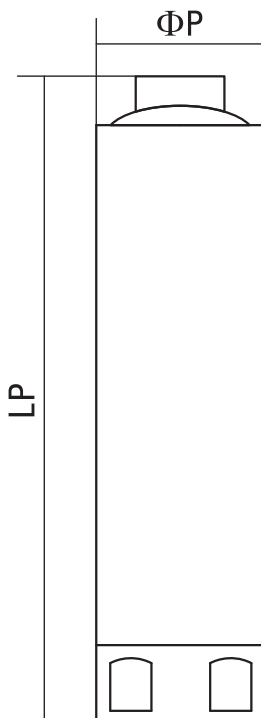

| | |
|---|--|
| Diffuser : Noryl | Top Diffuser : Noryl |
| Impeller : Noryl | Pump shaft : Stainless steel (AISI 304) |
| Coupling : Stainless steel (AISI 304) | Suction case : Stainless steel (AISI 304) |
| Strainer : Stainless steel (AISI 304) | Top bracket : Stainless steel (AISI 304) |
| Valve cap : Stainless steel (AISI 304) | Rotation : CCW |
| Wear box : Stainless steel (AISI 304) | Revolution : 2.900 rpm |



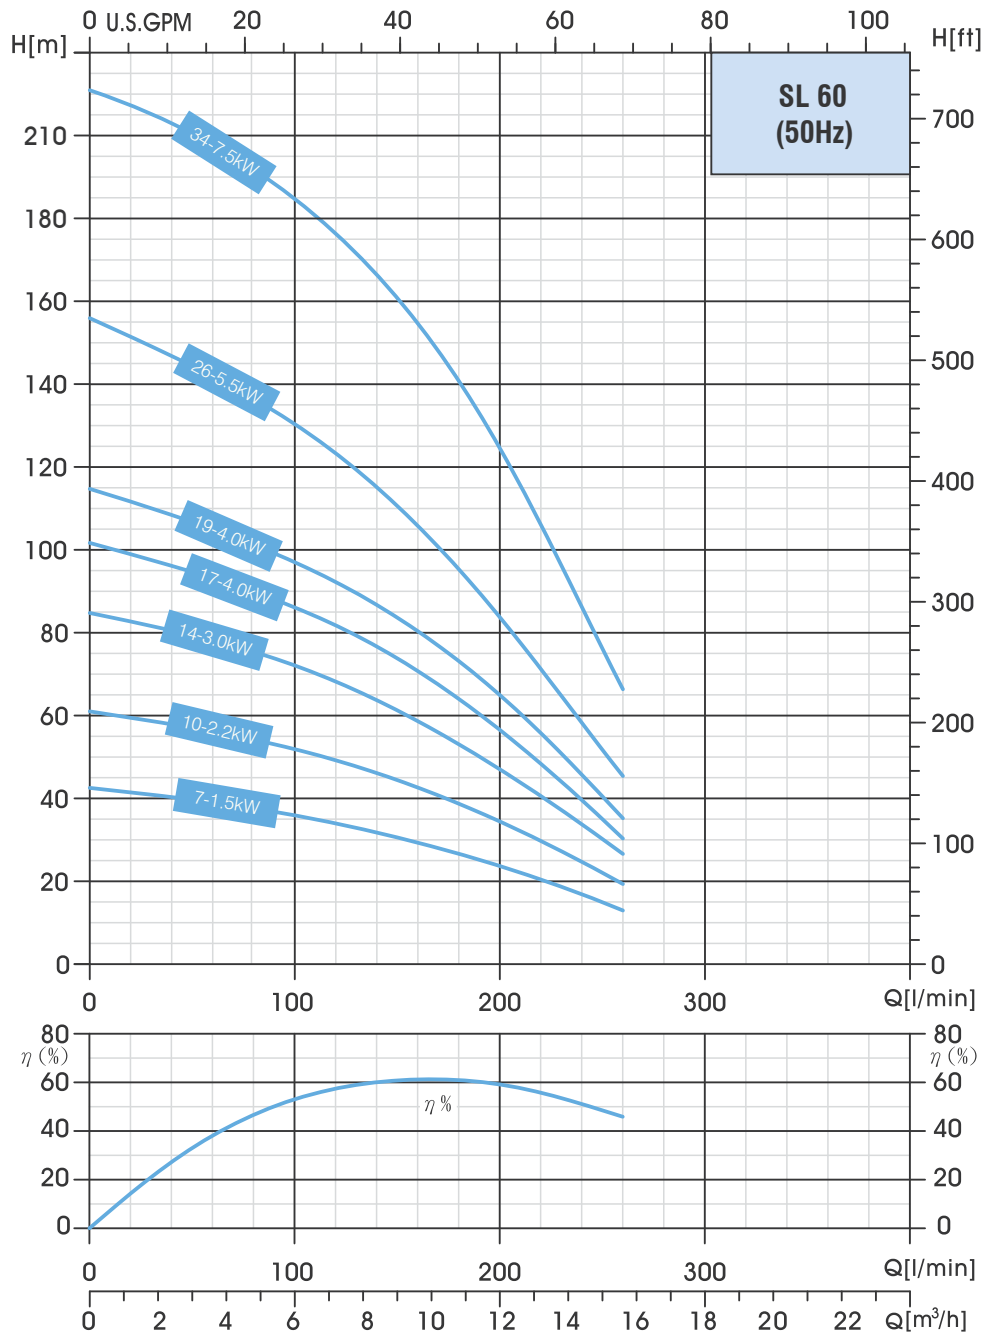

Dimensions and Performance Table

| Type | Stages | Motor | | | Pump | | | m³/h | l/min | 0 | 9.6 | 10.8 | 12 | 13 | 14.4 | 15.6 |
|----------|--------|-------|------|-------|-------|-----------------|------|----------|-------|-----|-----|------|-----|----|------|------|
| | | Type | kW | HP | L(mm) | DN (RPT or NPT) | Kg | | | | | | | | | |
| SL 60-7 | 7 | 4" | 1.50 | 2.00 | 534 | 2" | 5.3 | Head (m) | 45 | 31 | 28 | 25 | 22 | 18 | 14 | |
| SL 60-10 | 10 | 4" | 2.20 | 3.00 | 690 | 2" | 6.7 | | 64 | 44 | 41 | 36 | 32 | 26 | 20 | |
| SL 60-14 | 14 | 4" | 3.00 | 4.00 | 989 | 2" | 8.6 | | 89 | 62 | 56 | 49 | 43 | 35 | 29 | |
| SL 60-17 | 17 | 4" | 4.00 | 5.50 | 1.092 | 2" | 10.1 | | 107 | 74 | 67 | 59 | 51 | 42 | 33 | |
| SL 60-19 | 19 | 4" | 4.00 | 5.50 | 1.195 | 2" | 11.0 | | 120 | 89 | 76 | 68 | 58 | 48 | 38 | |
| SL 60-26 | 26 | 4" | 5.50 | 7.50 | 1.559 | 2" | 14.3 | | 163 | 111 | 100 | 87 | 75 | 61 | 47 | |
| SL 60-34 | 34 | 4" | 7.50 | 10.00 | 2.049 | 2" | 20.9 | | 221 | 155 | 140 | 125 | 108 | 90 | 67 | |