



SALSUB
SUBMERSIBLE BOREHOLE PUMPS


4" SUBMERSIBLE PUMPS



STEWARTS  & LLOYDS



SALSUB
SUBMERSIBLE BOREHOLE PUMPS



4" SUBMERSIBLE PUMPS
50 HZ

Multi-stage centrifugal submersible pumps for clean water in 4" wells.

The 4" SL pump series is carefully designed and manufactured for maximum resistance against sand and other impurities providing a long life and trouble free operations. The Floating Impeller design ensures an excellent resistance to wear and tear against sand and other impurities.

The Discharge Head and Motor Adapter are made of precision-cast stainless steel ensuring maximum resistance to corrosion, strength and rigid coupling to the motor.

The Non-Return Valve is integrated in the head to support the weight of the water column and to protect against water hammer, thus safeguarding impellers and diffusers.



- Capacity up to 25 m³/h
- Rated motor power output up to 7.5 KW
- Maximum water temperature from 0 °C to 35 °C
- Maximum overall diameter of the pump inclusive of cable guard is 97.5 mm
- Maximum permissible quantity of suspended sand of 150g/m³
- Radial and mixed flow impeller
- Delivery port - 1.25", 1.5", 2"

Features

Powered for Continuous Operation. All ratings are within the working limits of the motor. Pump can be operated continuously without damage to the motor.

Sand Resistant Construction. Field proven over almost four decades, face clearance design and floating impellers for an extremely abrasion resistant configuration.

Stainless Steel Metal Parts. Bowls, Casing, Discharge Head, Motor Adapter, Shaft, Coupling, Bushings, Cable Guard, Strainer. Check Valve are constructed of a corrosion resistant, non-toxic and non-leaching stainless steel.

FDA Compliant Non-Metallic Parts. Impellers, Diffusers and Bearing Spiders are constructed of a glass filled engineered composite. This material is corrosion resistant and non-toxic.

Discharge Head. High profile precision cast stainless steel for superior strength and durability. Cast in loop for safety line.

Motor Adapter. Precision cast stainless steel is extremely rigid for accurate alignment of wet end to motor. Generous space for removal of motor mounting nuts with regular open-end wrench.

Bowls. Stainless steel for superior strength and abrasive resistance.

Built in Check Valve. Built in check valve constructed of stainless steel and low compression, FDA compliant, BUNA rubber for excellent abrasive resistance and quiet, efficient operation.


Urethane Upper and Intermediate Bearings. Fluted design for free passage of abrasives and excellent resistance to sand damage.

Stainless Steel Casing. Polished stainless steel is attractive and durable in the most corrosive water.


Hex Shaft Design. Six sided shafts for positive impeller drive.

Shaft Coupling. Exposed for ease of field alignment to motor shaft and to check pump rotation.

Strainer. Non collapsible stainless steel with generous water passage for maximum design flow.




Product Code System

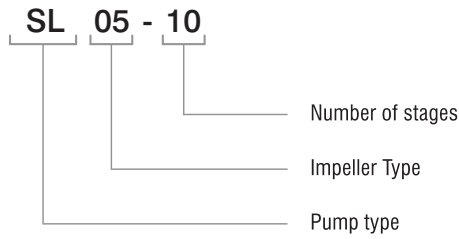

Part List

No	Part Name	Material
1	Top Bracket	Stainless Steel
2	Valve Cap	Stainless Steel
3	Valve Seat Retainer	Rubber
4	Valve Seat	Stainless Steel
5	Valve Locking Ring	Stainless Steel
6	Adapter Ring	Noryl
7	Top Bushing	Stainless Steel
8	Top Bearing	Polyurethane
9	Top Diffuser	Noryl
10	Diffuser	Noryl
11	Impeller	Noryl
12	Wear Box	Stainless Steel
13	Shim	Stainless Steel
14	Suction Case	Stainless Steel
15	Filter	Stainless Steel
16	O-ring	Rubber
17	Coupling	Stainless Steel
18	Shaft	Stainless Steel
19	Clip Ring	Stainless Steel
20	Shim	Stainless Steel
21	Jacket Pipe	Stainless Steel
22	Cable Guard	Stainless Steel
23	Nut	Stainless Steel
24	Gasket	Stainless Steel
25	Strap	Stainless Steel

Technical Drawing

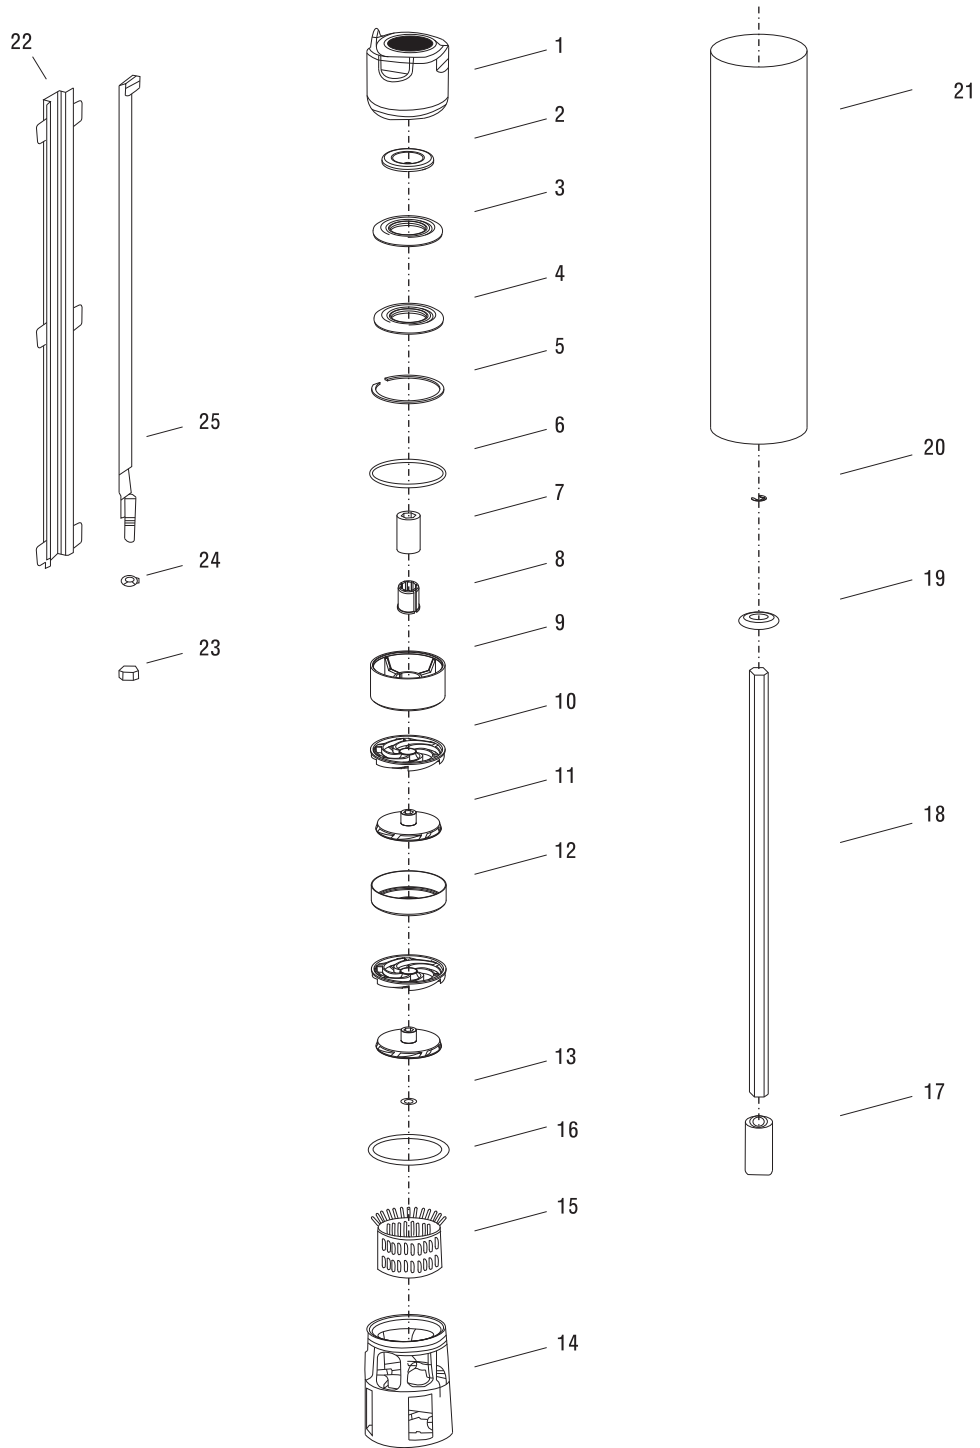


SL 05 (50Hz)

No. of vanes 7	Capacity 0,3-1,5 m ³ /h
Outlet connection diameter (inside threaded) 1 ¼"	Delivery head 234 - 52 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

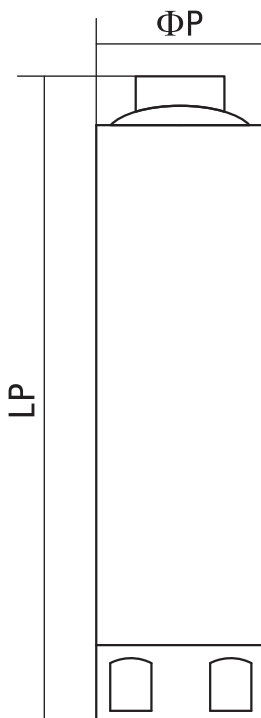

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



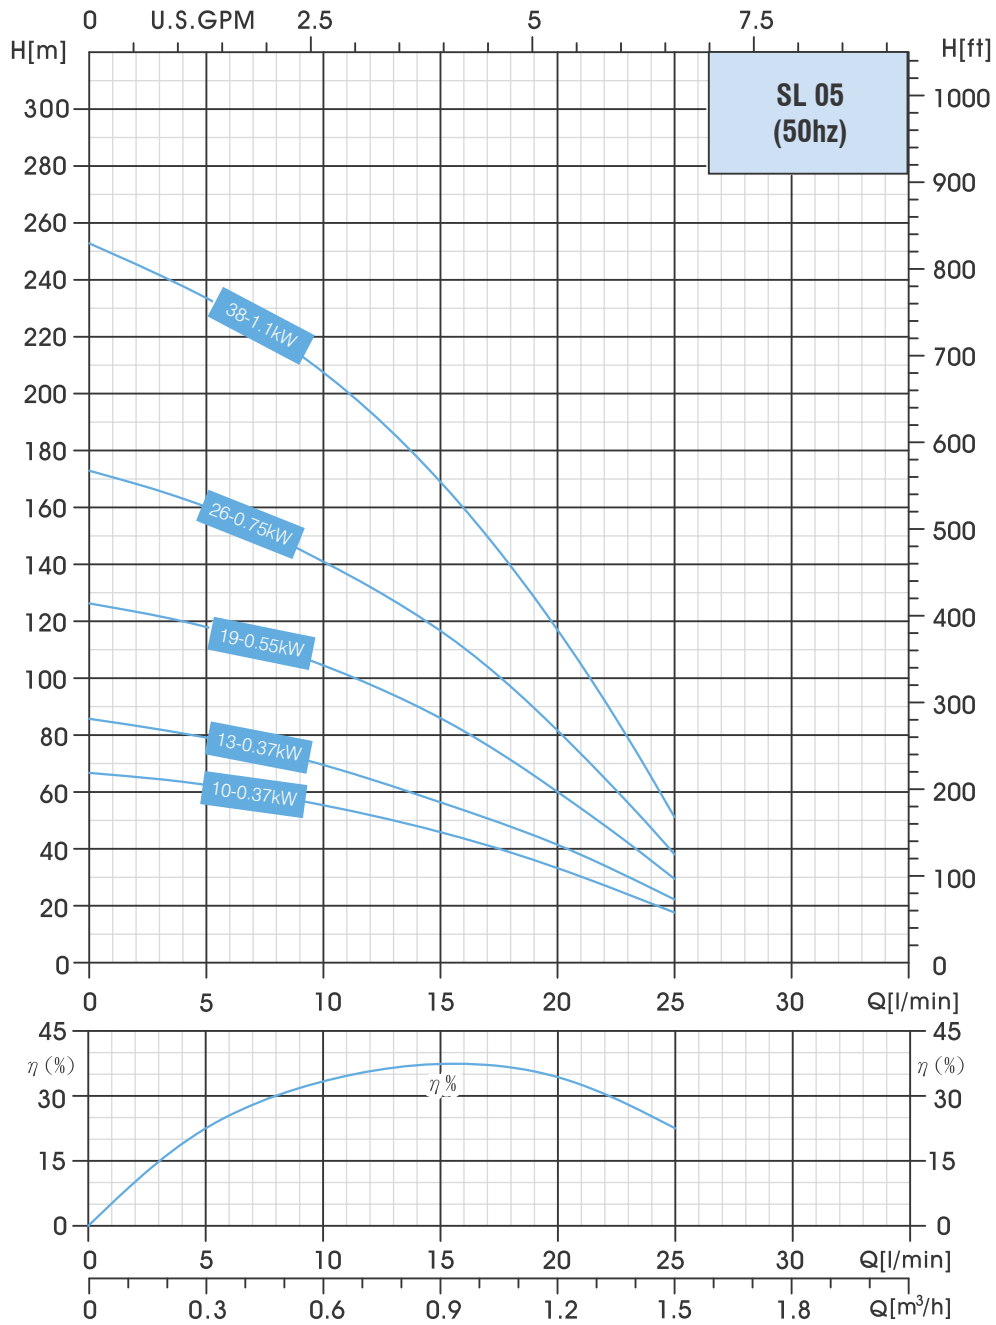

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h	0	0.3	0.6	0.9	1.2	1.5
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg		l/min	0	5	10	15	20
SL 05-10	10	4"	0.37	0.50	324	1.25"	3.3	Head (m)	67	63	55	46	33	18
SL 05-13	13	4"	0.37	0.50	377	1.25"	3.7		86	78	70	56	42	23
SL 05-19	19	4"	0.55	0.75	481	1.25"	4.7		126	118	105	86	60	30
SL 05-26	26	4"	0.75	1.00	642	1.25"	5.8		173	160	141	117	81	39
SL 05-38	38	4"	1.10	1.50	864	1.25"	8.2		253	234	208	169	117	52


SL 10 (50Hz)

No. of vanes 7	Capacity 1,5-3 m ³ /h
Outlet connection diameter (inside threaded) 1 ¼"	Delivery head 294 - 138 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

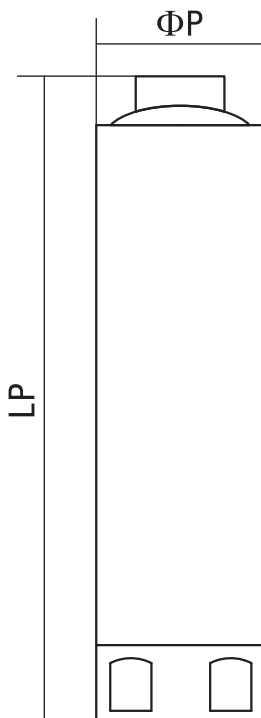

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



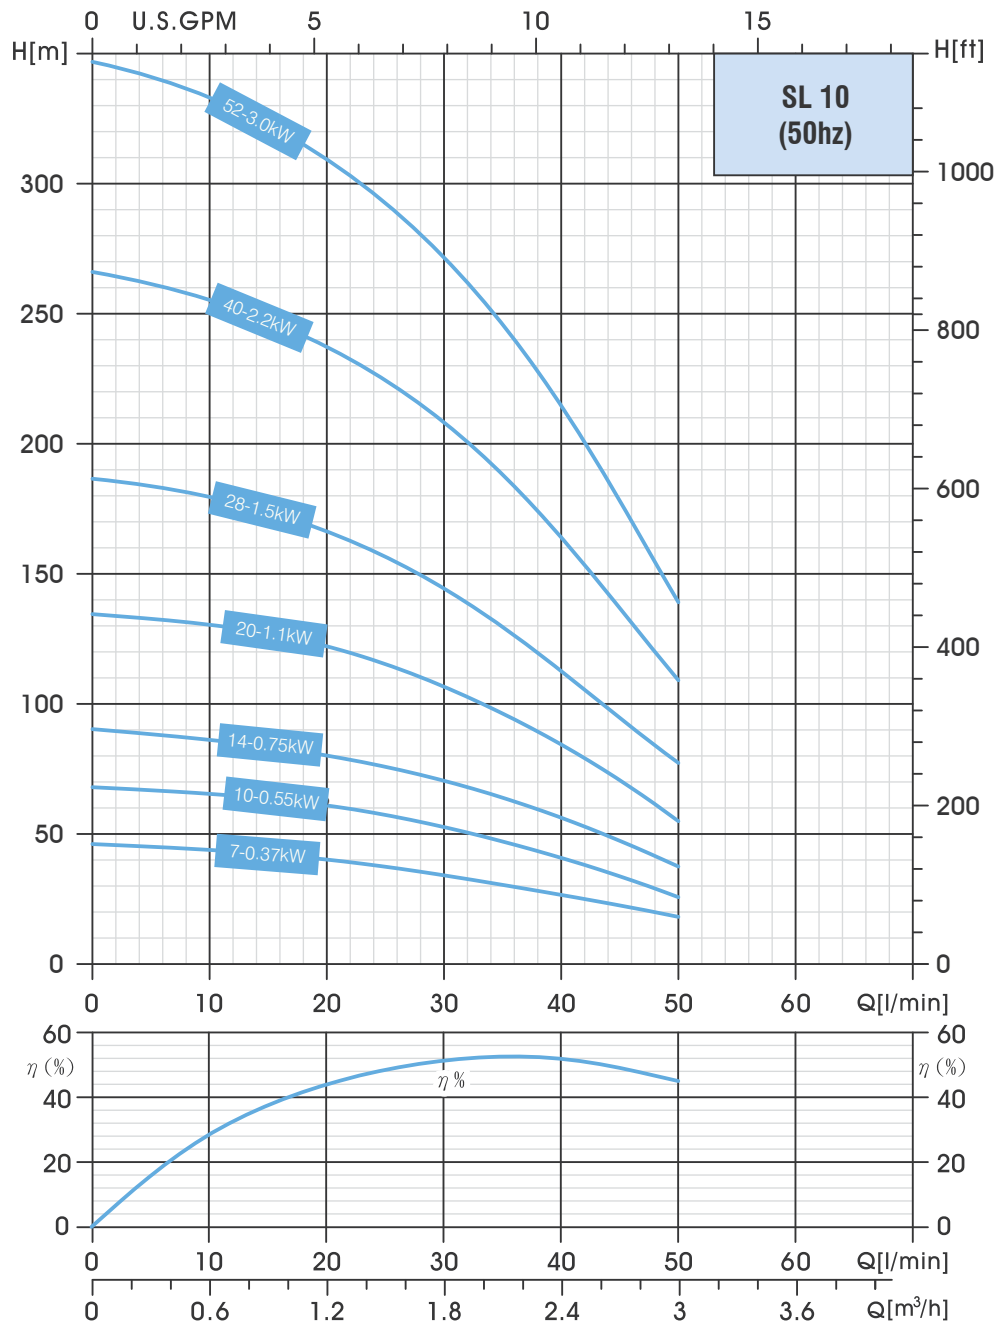

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h						
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg	0	1.5	1.8	2.1	2.4	2.7	3
SL 10-7	7	4"	0.37	0.50	280	1.25"	2.9	0	25	30	35	40	45	50
SL 10-10	10	4"	0.55	0.75	332	1.25"	3.5	47	39	52	47	41	35	27
SL 10-14	14	4"	0.75	1.00	402	1.25"	4.2	67	56	73	66	57	50	37
SL 10-20	20	4"	1.10	1.50	507	1.25"	5.3	93	78	104	97	82	72	53
SL 10-28	28	4"	1.50	2.00	680	1.25"	7.1	133	113	146	130	115	97	74
SL 10-40	40	4"	2.20	3.00	914	1.25"	10.1	187	158	208	186	164	136	106
SL 10-52	52	4"	3.00	4.00	1.120	1.25"	12.2	267	226	271	243	213	178	138


SL 13 (50Hz)

No. of vanes 7	Capacity 2,1-4,2 m ³ /h
Outlet connection diameter (inside threaded) 1 ¼"	Delivery head 177 - 64 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

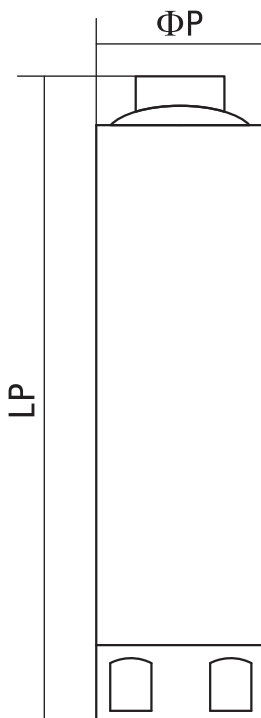

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



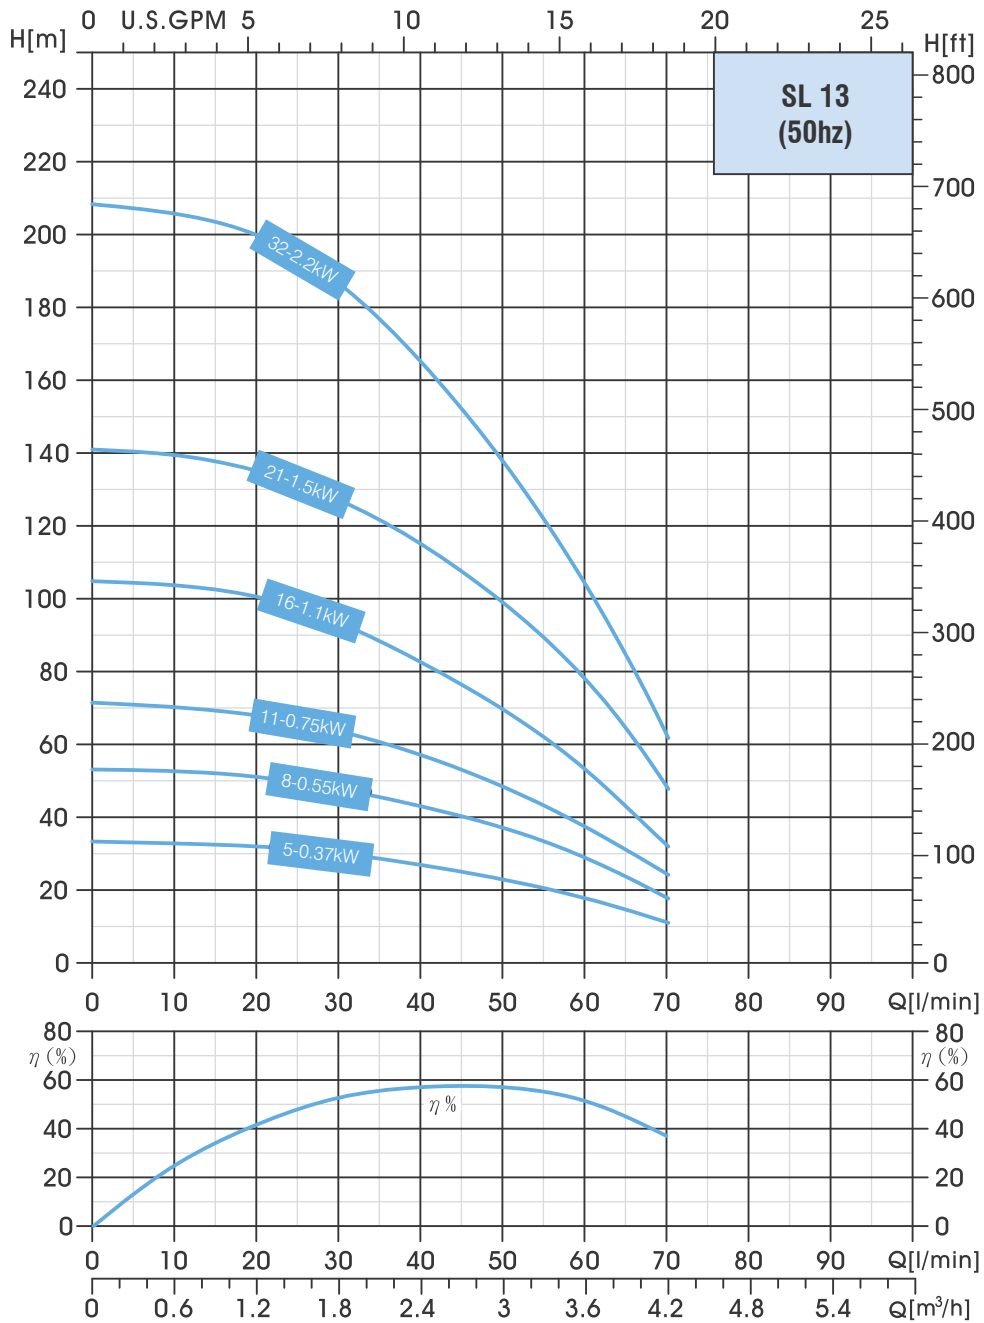

Dimensions and Performance Table

Type	Stages	Motor			Pump			m ³ /h	0	2.1	2.4	2.7	3.0	3.5	4.2
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg								
SL 13-5	5	4"	0.37	0.50	236	1.25"	2.5	l/min	0	35	40	45	50	60	70
SL 13-8	8	4"	0.55	0.75	289	1.25"	2.9	Head (m)	34	29	27	25	23	18	12
SL 13-11	11	4"	0.75	1.00	342	1.25"	3.4		54	46	43	41	38	30	19
SL 13-16	16	4"	1.10	1.50	430	1.25"	4.2		72	61	58	54	49	38	28
SL 13-21	21	4"	1.50	2.00	519	1.25"	5.0		106	89	83	77	70	54	34
SL 13-21	21	4"	1.50	2.00	519	1.25"	5.0		142	122	115	108	100	79	49
SL 13-32	32	4"	2.20	3.00	749	1.25"	7.1		208	177	165	152	138	104	64


SL 20 (50Hz)

No. of vanes 7	Capacity 3,0-6,0 m ³ /h
Outlet connection diameter (inside threaded) 1 ¼"	Delivery head 245 - 70 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

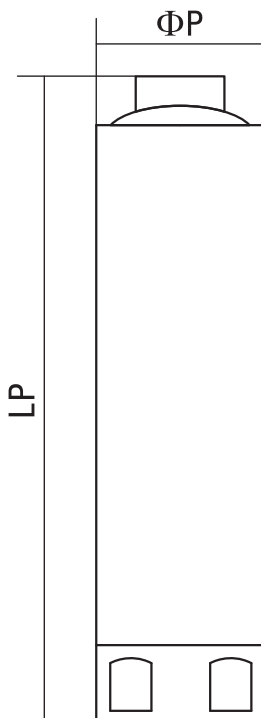

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



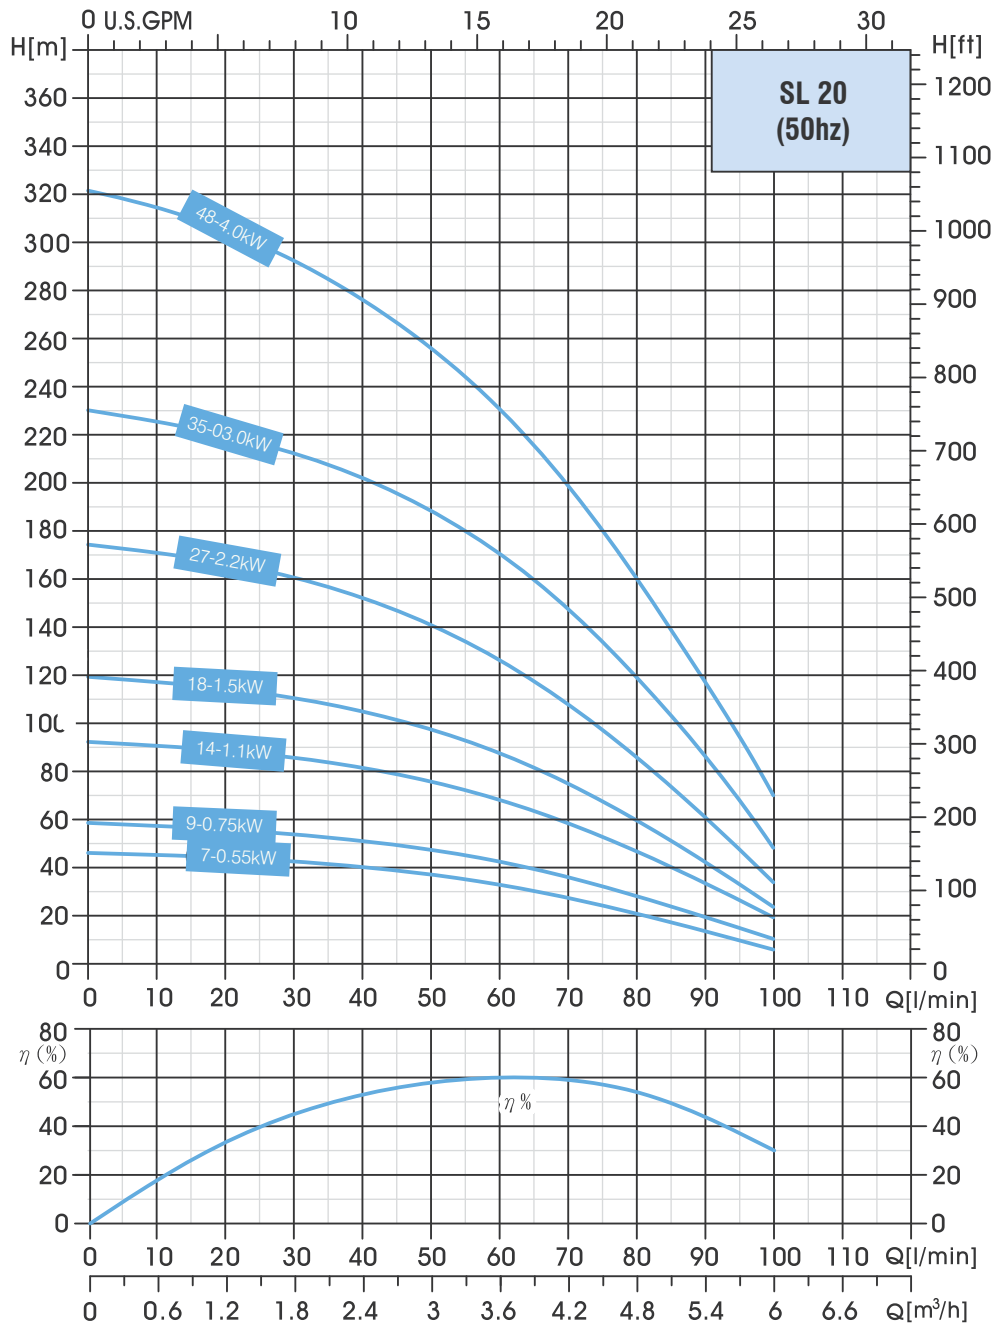

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h							
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg	0	3.0	3.6	4.2	4.8	5.4	6.0	
								l/min	0	50	60	70	80	90	100
SL 20-7	7	4"	0.55	0.75	301	1.25"	3.0	Head (m)	46	36	33	28	21	13	7
SL 20-9	9	4"	0.75	1.00	344	1.25"	3.3		59	47	43	37	28	20	10
SL 20-14	14	4"	1.10	1.50	452	1.25"	4.1		93	76	68	58	47	33	19
SL 20-18	18	4"	1.50	2.00	538	1.25"	4.7		120	98	88	75	60	42	25
SL 20-27	27	4"	2.20	3.00	767	1.25"	6.2		175	141	127	109	87	61	35
SL 20-35	35	4"	3.00	4.00	934	1.25"	7.9		231	184	166	145	119	85	49
SL 20-48	48	4"	4.00	5.50	1.253	1.25"	9.9		322	245	228	198	160	118	70


SL 25 (50Hz)

No. of vanes 7	Capacity 3,6-6,6 m ³ /h
Outlet connection diameter (inside threaded) 1 ¼"	Delivery head 230 - 94 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

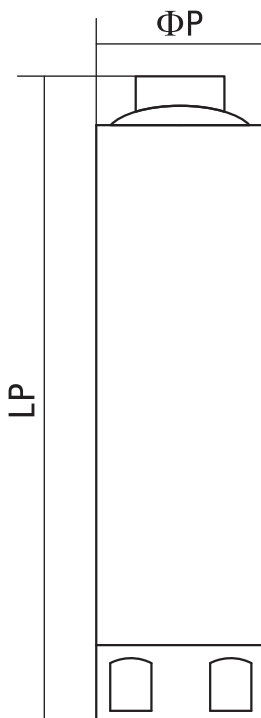

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



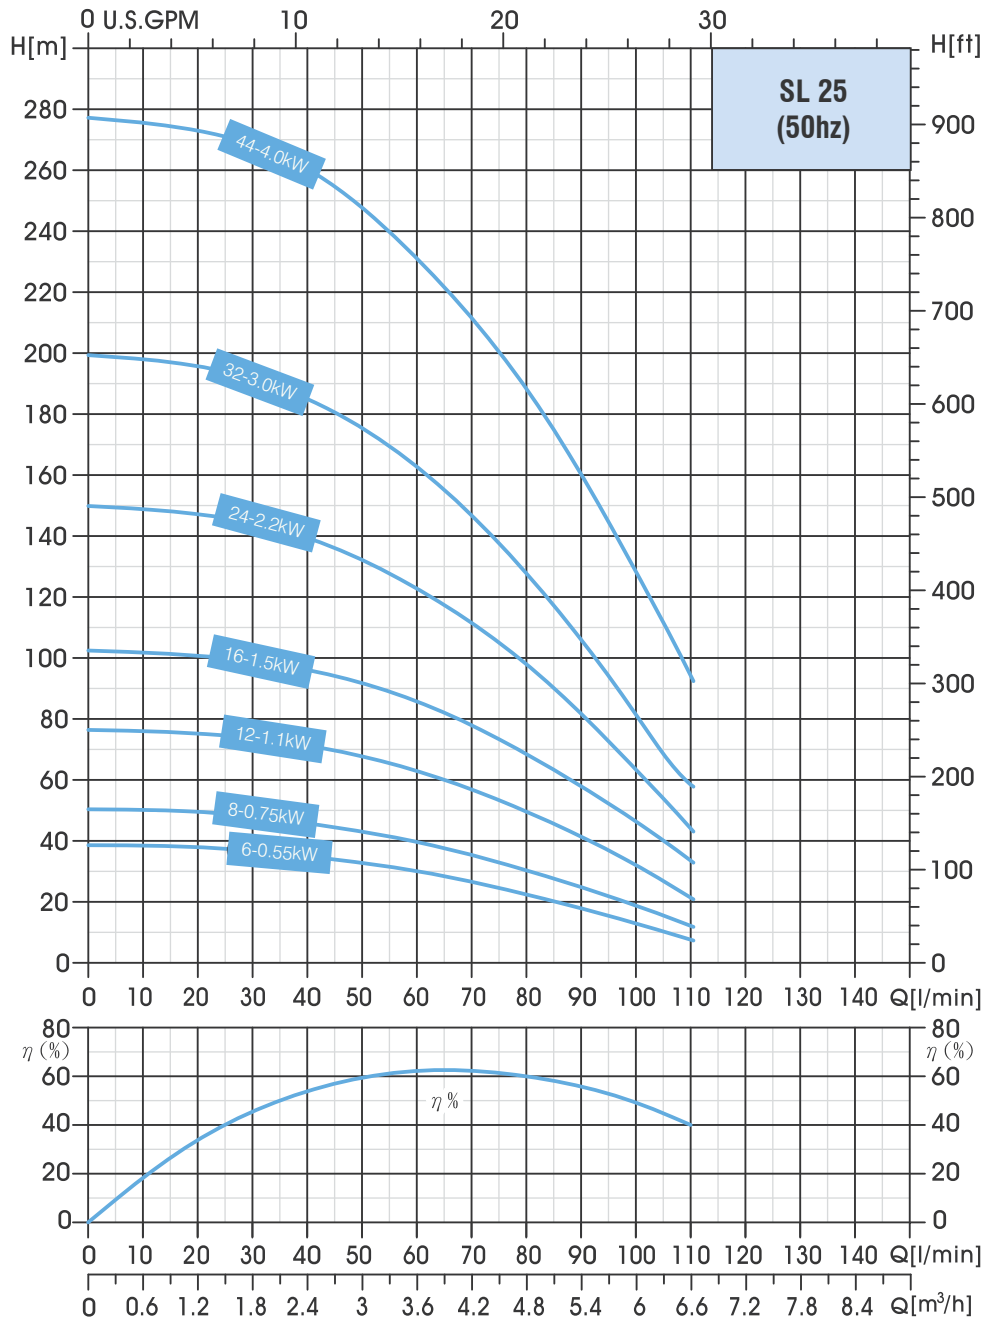

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h						
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-6	6	4"	0.55	0.75	296	1.25"	2.9	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-8	8	4"	0.75	1.00	345	1.25"	3.3	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-12	12	4"	1.10	1.50	433	1.25"	4.1	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-16	16	4"	1.50	2.00	542	1.25"	5.0	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-24	24	4"	2.20	3.00	777	1.25"	6.6	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-32	32	4"	3.00	4.00	965	1.25"	8.7	0	3.6	4.2	4.8	5.4	6.0	6.6
SL 25-44	44	4"	4.00	5.50	1.296	1.25"	11.2	0	3.6	4.2	4.8	5.4	6.0	6.6


SL 30 (50Hz)

No. of vanes 7	Capacity 5,4-9,0 m ³ /h
Outlet connection diameter (inside threaded) 2"	Delivery head 209 - 64 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

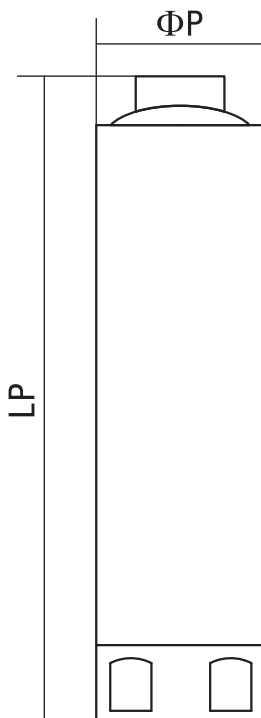

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



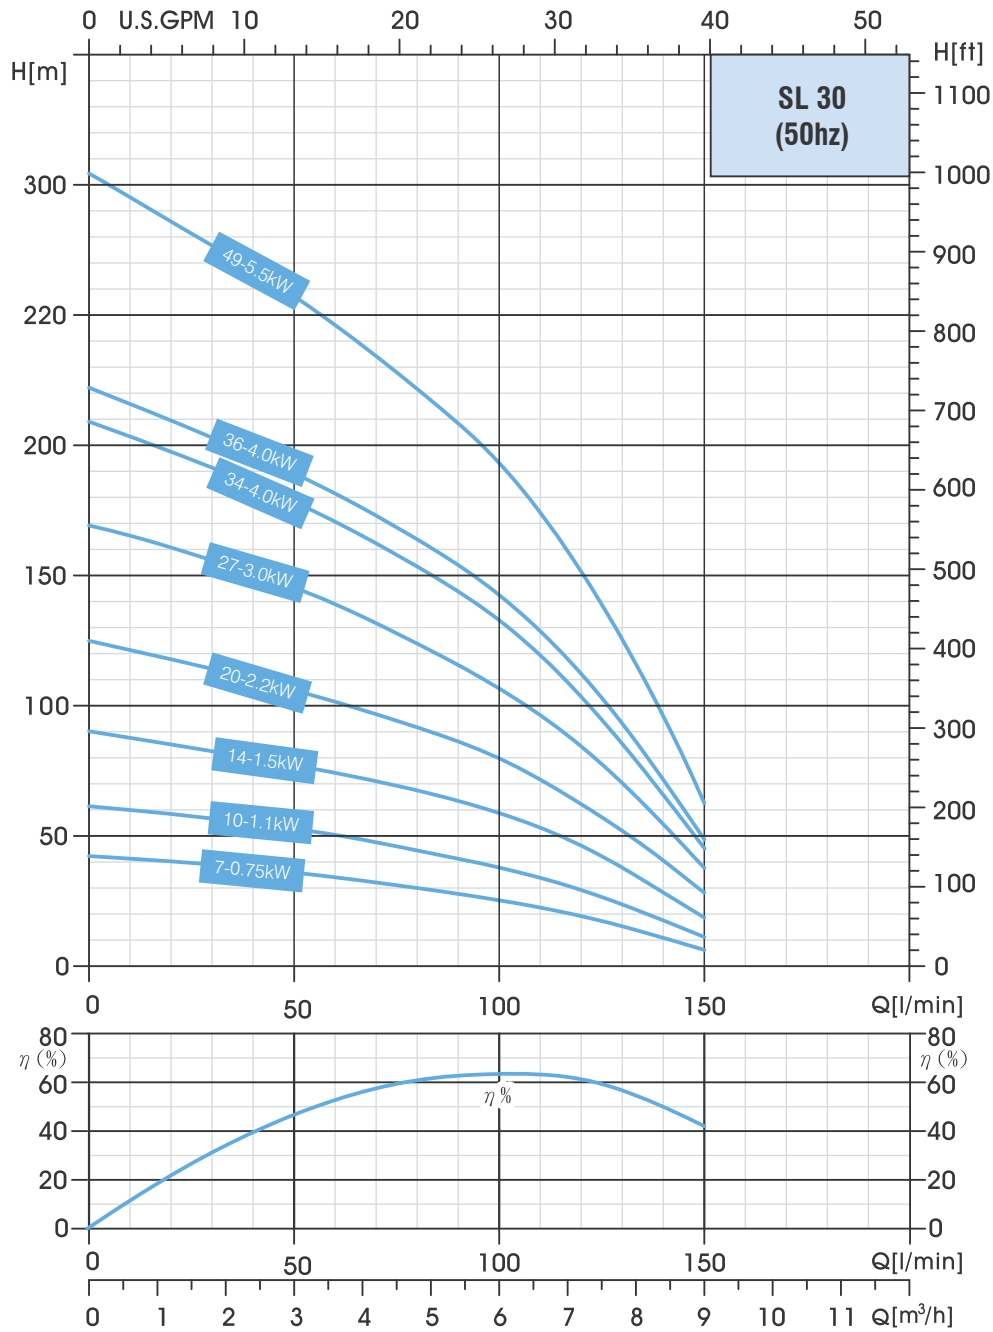

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h	0	5.4	6	6.6	7.2	7.8	9.0
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg								
SL 30-7	7	4"	0.75	1.00	390	2"	3.7	l/min	0	90	100	110	120	130	150
SL 30-10	10	4"	1.10	1.50	483	2"	4.6	Head (m)	42	28	25	22	19	15	8
SL 30-14	14	4"	1.50	2.00	607	2"	5.7		62	41	38	34	29	23	12
SL 30-20	20	4"	2.20	3.00	831	2"	7.5		90	63	59	53	46	37	19
SL 30-27	27	4"	3.00	4.00	1048	2"	9.6		125	86	80	71	62	52	29
SL 30-34	34	4"	4.00	5.50	1257	2"	11.6		169	115	107	96	84	70	39
SL 30-36	36	4"	4.00	5.50	1318	2"	12.2		208	143	132	120	103	86	48
SL 30-49	49	4"	5.50	7.50	1802	2"	15.9		221	154	143	127	112	93	49
									302	209	193	171	151	123	64


SL 40 (50Hz)

No. of vanes 7	Capacity 7,2-12,0 m ³ /h
Outlet connection diameter (inside threaded) 2"	Delivery head 160 - 80 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

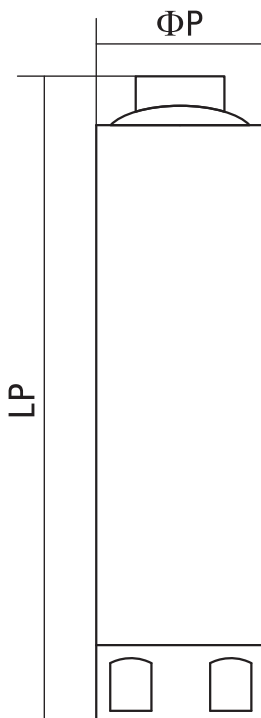

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



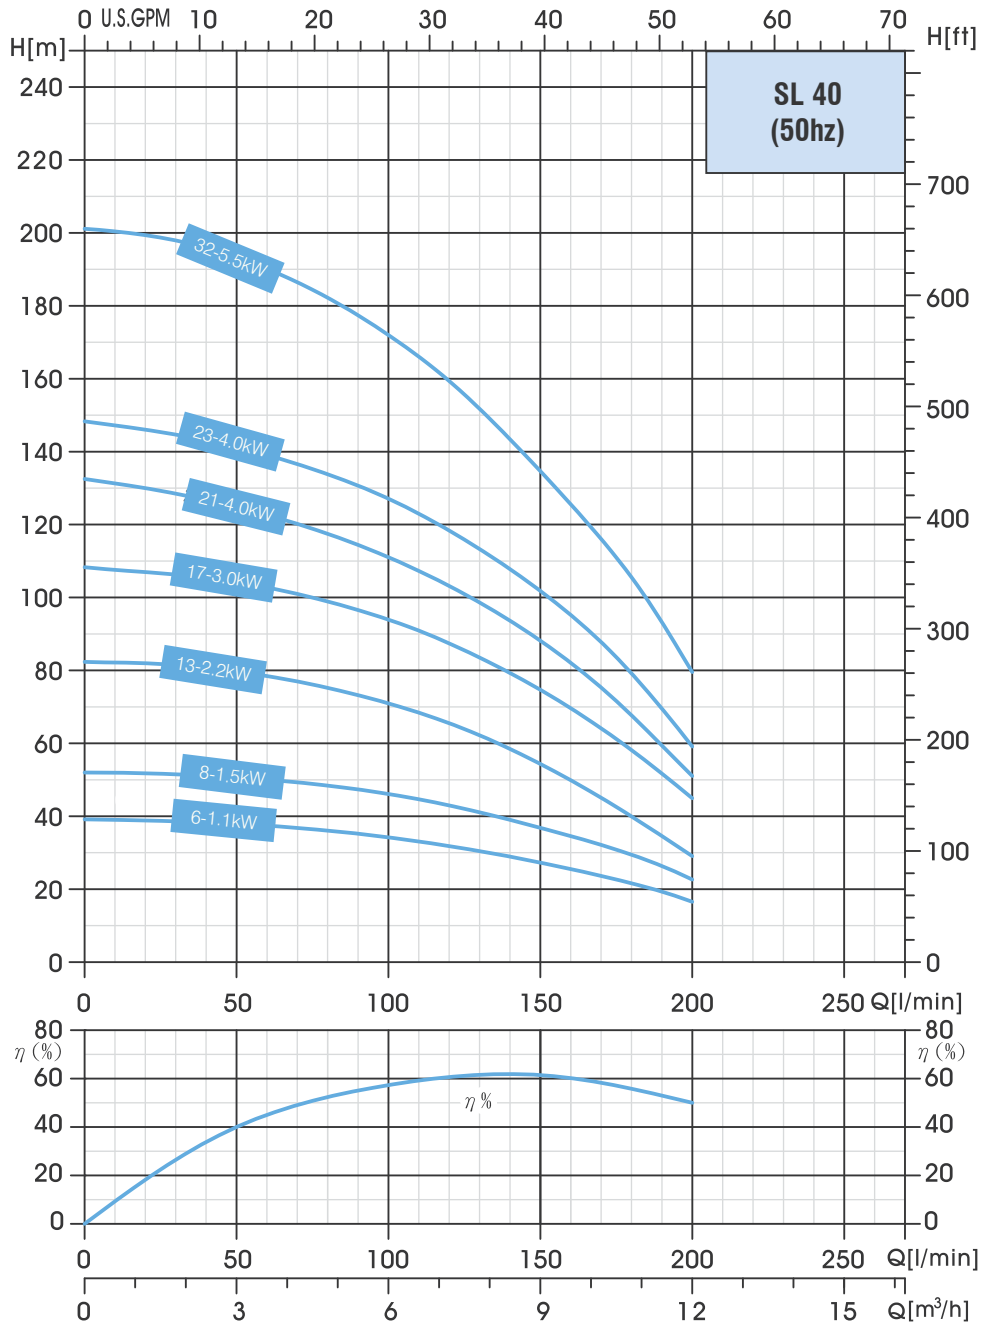

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h	Head (m)						
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg		0	7.2	7.8	8.4	9.0	9.6	12.0
								l/min	0	120	130	140	150	160	200
SL 40-6	6	4"	1.10	1.50	356	2"	3.4	Head (m)	39	32	30	29	27	26	18
SL 40-8	8	4"	1.50	2.00	418	2"	4.0		52	43	40	39	37	35	24
SL 40-13	13	4"	2.20	3.00	573	2"	5.5		82	66	62	59	53	50	30
SL 40-17	17	4"	3.00	4.00	697	2"	6.6		108	87	83	79	75	70	47
SL 40-21	21	4"	4.00	5.50	859	2"	7.8		132	103	98	93	88	82	52
SL 40-23	23	4"	4.00	5.50	921	2"	8.4		148	118	113	108	101	95	60
SL 40-32	32	4"	5.50	7.50	1.238	2"	11.0		202	160	151	143	133	125	80


SL 60 (50Hz)

No. of vanes	6	Capacity	9,6-15,6 m³/h
Outlet connection diameter (inside threaded) 2"		Delivery head	155 - 67 mt
Pump outside diameter	95 mm	Shaft diameter (Hexagonal) 11 mm	




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

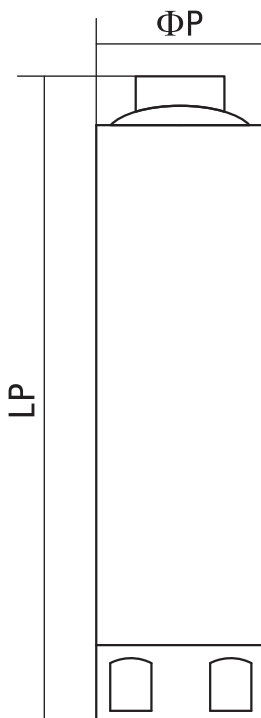

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



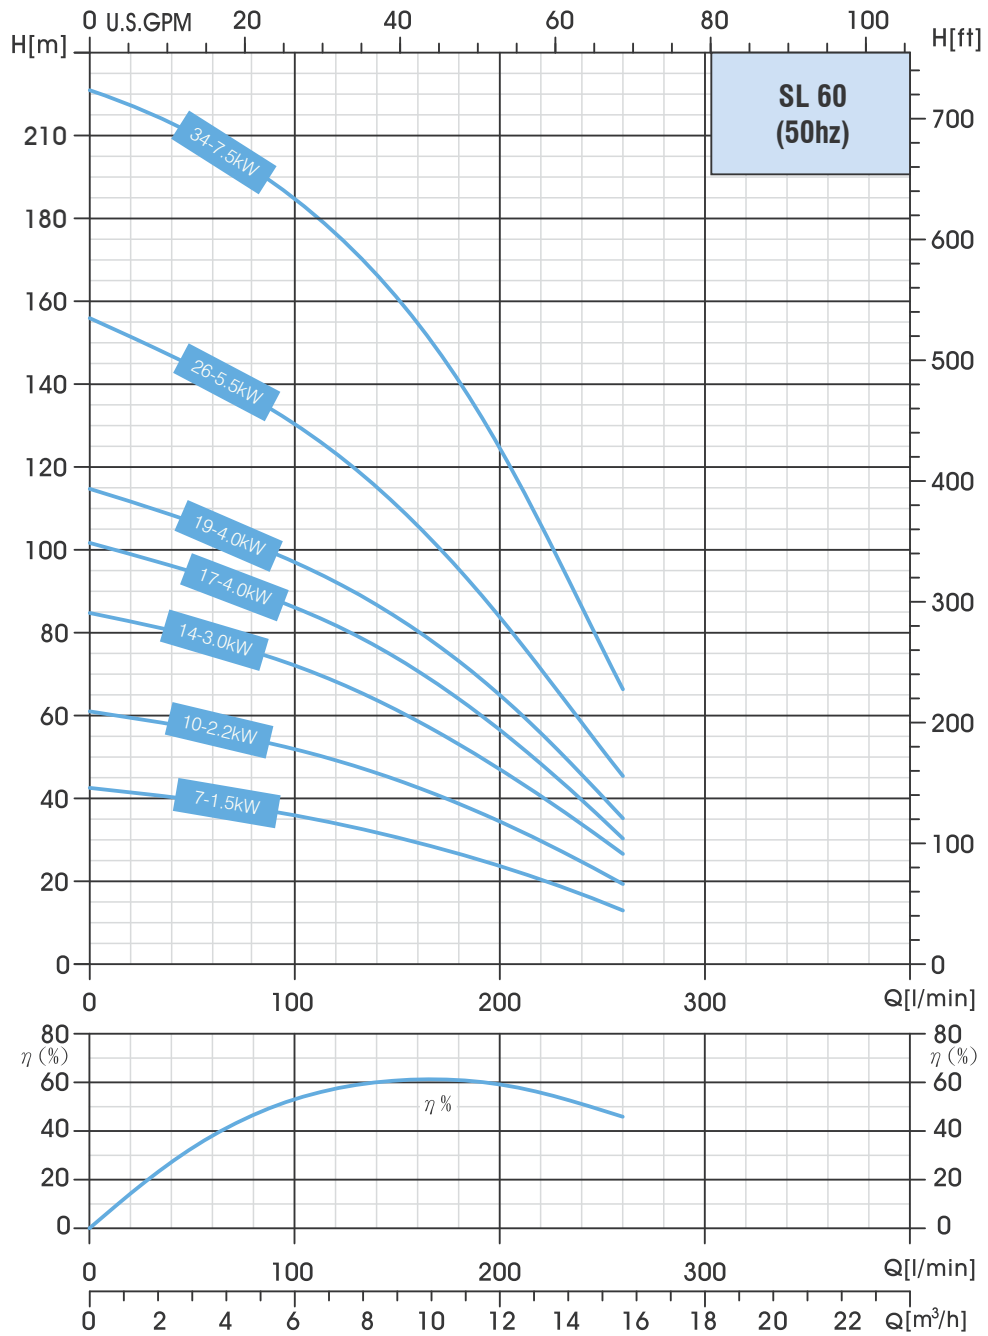

Dimensions and Performance Table

Type	Stages	Motor			Pump			m ³ /h	l/min	0	9.6	10.8	12	13	14.4	15.6
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg									
SL 60-7	7	4"	1.50	2.00	534	2"	5.3	Head (m)	45	31	28	25	22	18	14	
SL 60-10	10	4"	2.20	3.00	690	2"	6.7		64	44	41	36	32	26	20	
SL 60-14	14	4"	3.00	4.00	989	2"	8.6		89	62	56	49	43	35	29	
SL 60-17	17	4"	4.00	5.50	1.092	2"	10.1		107	74	67	59	51	42	33	
SL 60-19	19	4"	4.00	5.50	1.195	2"	11.0		120	89	76	68	58	48	38	
SL 60-26	26	4"	5.50	7.50	1.559	2"	14.3		163	111	100	87	75	61	47	
SL 60-34	34	4"	7.50	10.00	2.049	2"	20.9		221	155	140	125	108	90	67	


SL 80 (50Hz)

No. of vanes 7	Capacity 15,6-24,0 m ³ /h
Outlet connection diameter (inside threaded) 2"	Delivery head 92 - 48 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

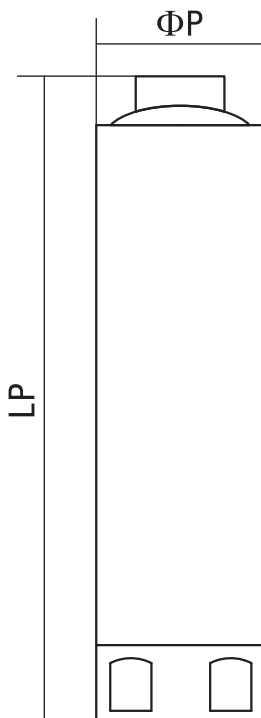

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



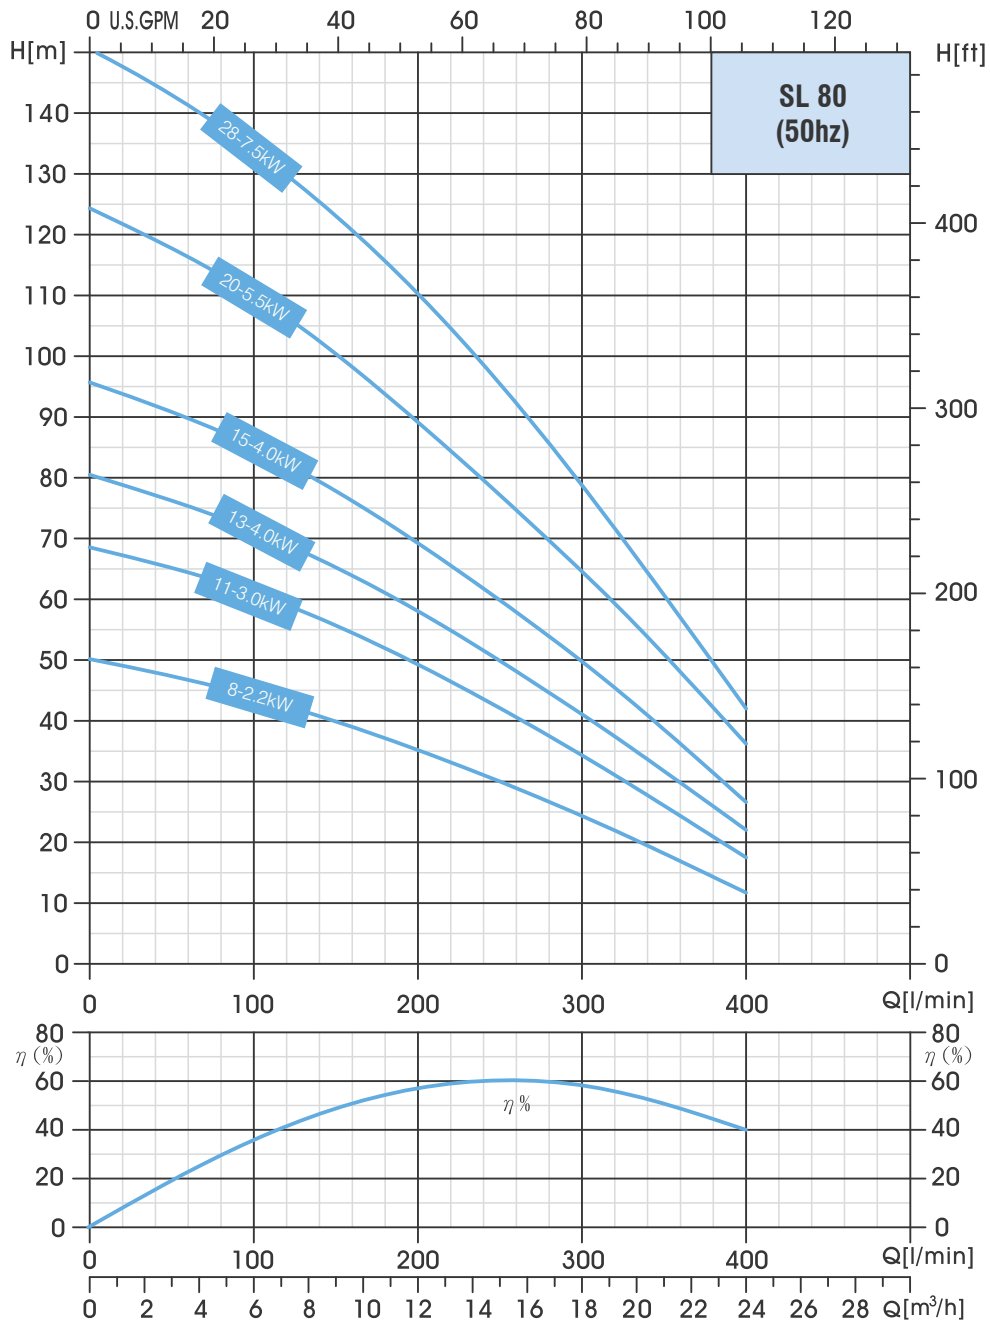

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h							
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg	0	15.6	16.8	18.0	19.2	20.4	24.0	
								l/min	0	260	280	300	320	340	400
SL 80-8	8	4"	2.20	3.00	676	1.25"	6.3	Head (m)	51	29	27	24	20	18	13
SL 80-11	11	4"	3.00	4.00	880	1.25"	8.1		70	41	38	34	30	27	18
SL 80-13	13	4"	4.00	5.50	1.013	1.25"	9.3		81	48	45	41	36	32	23
SL 80-15	15	4"	4.00	5.50	1.149	1.25"	10.5		97	58	54	50	43	39	27
SL 80-20	20	4"	5.50	7.50	1.489	1.25"	13.5		125	74	70	65	56	44	36
SL 80-28	28	4"	7.50	10.00	2.096	1.25"	21.2		151	92	85	78	70	62	48



SALPAK LITE 1

25mm PIPE **3" SALPAK LITE**

SUBMERSIBLE BOREHOLE PUMPS

PERFORMANCE TABLE


MODEL	PUMP	KW 230 V	ROPE (M)	CABLE (M)	M3/H	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3
						L/MIN	0	5	10	15	20	25	30	35	40	45
SALPAK LITE 1	SPL-2-10	0.25	50	50	Head (M)	42	41	41	39	37	34	30	26	21	15	9
						59	57	57	55	52	48	42	38	29	20	13
SALPAK LITE 2	SPL-2-14	0.37	60	60	Head (M)	84	82	81	78	74	68	60	52	41	29	18
SALPAK LITE 3	SPL-2-20	0.55	70	70												

INCLUDES: 1X BASE PLATE, 3X COMPRESSION FITTINGS, SAFETY ROPE, CABLE, PUMP, MOTOR AND CONTROL BOX

Available in:
Salpak lite 1
Salpak lite 2
Salpak lite 3
****Comes with 25mm fittings**

3" SALPAK LITE

SUBMERSIBLE BOREHOLE PUMPS

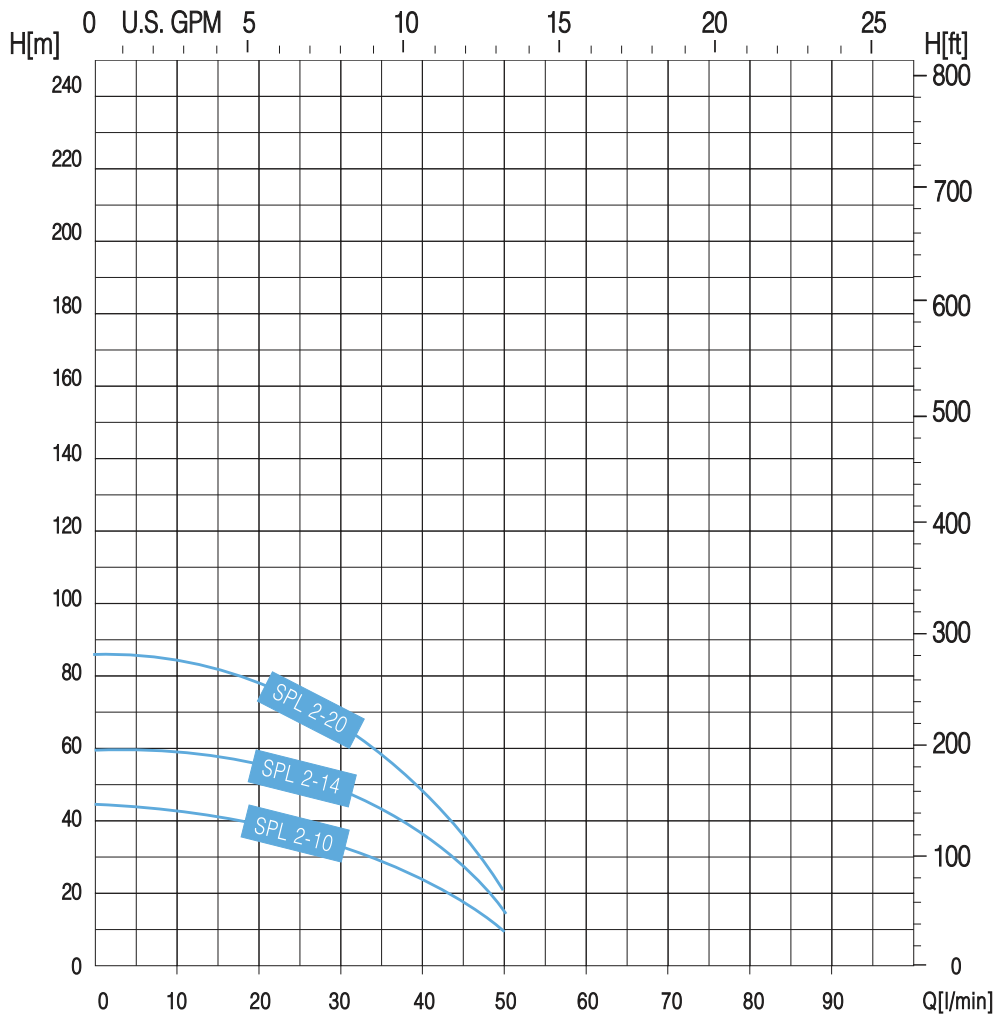


Dimensions and Performance Table

Type	Motor			m ³ /h l/min	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0
	kW	HP	Rope		0	5	10	15	20	25	10	15	20	25	25
SPL 02-10	0.25	0.33	50	Head (m)	42	41	41	39	37	34	30	26	21	15	9
SPL 02-14	0.37	0.50	60		59	57	57	55	52	48	42	36	29	20	13
SPL 02-20	0.55	0.75	70		84	82	81	78	74	68	60	52	41	29	18



SALSUB

SUBMERSIBLE BOREHOLE PUMPS

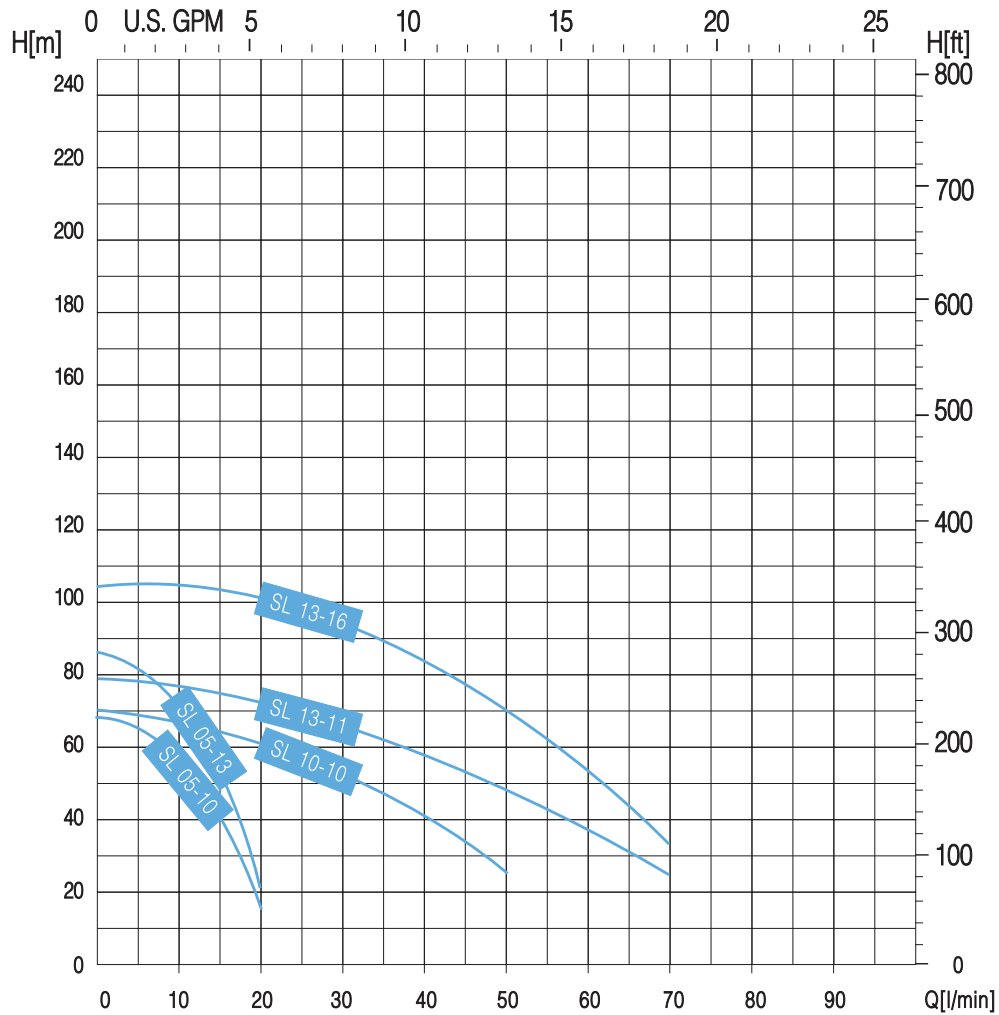

Dimensions and Performance Table

Type	Stages	Motor			Pump			Flow Rate					
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg	l/min	0	0.3	0.6	0.9	1.2
SL 05-10	10	4"	0.37	0.50	324	1.25"	3.3	67	63	55	46	33	18
SL 05-13	13	4"	0.37	0.50	377	1.25"	3.7	86	78	70	56	42	23

Type	Stages	Motor			Pump			Flow Rate						
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg	l/min	0	1.5	1.8	2.1	2.4	2.7
SL 10-10	10	4"	0.55	0.75	332	1.25"	3.5	67	56	52	47	41	35	27

Type	Stages	Motor			Pump			Flow Rate						
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg	l/min	0	2.1	2.4	2.7	3	3.3
SL 13-11	11	4"	0.75	1.00	342	1.25"	3.4	72	61	58	54	49	38	28
SL 13-16	16	4"	1.10	1.50	430	1.25"	4.2	106	89	83	77	70	54	34

Gauteng Distributors

Stewarts & Lloyds Alrode

213 Bosworth Str, Alrode South 1451
P O Box 233, Alberton, 1450
Tel: 011 900 4270
Fax: 011 900 4283

Stewarts & Lloyds Boksburg

280 Main Reef Road, Boksburg North 1459
P O Box 6808, Dunswart, 1508
Tel: 011 917 7963
Fax: 011 917 0769

Stewarts & Lloyds Booysens

118, 4th Street, Booysens Reserve 2091
P O Box 39283, Booysens, 2016
Tel: 011 496 3000
Fax: 011 496 3012

Stewarts & Lloyds Distribution Centre (Purchasing / Procurement)

154 Tedstone Road, Wadeville, Germiston
P O Box 14021, Wadeville, 1422
Tel: 011 864 8871
Fax: 086 743 8136

Stewarts & Lloyds Exports

Cnr. Jacobs & Old Vereeniging Rd, Alrode
P O Box 79458, Senderwood 2145
Tel: 011 917 0778

Stewarts & Lloyds Irrigation

4 Brahman Crescent,
Longmeadow Business Park, Edenvale,
1613
P O Box 13379, Dowerglen, 1612
Tel: 011 608 0155
Fax: 011 608 3703

Stewarts & Lloyds Pumps

4 Brahman Crescent,
Longmeadow Business Park, Edenvale,
1613
P O Box 13379, Dowerglen, 1612
Tel: 011 608 2233

Stewarts & Lloyds Manufacturing (Fencing And Roofing)

154 Tedstone Road, Wadeville, Germiston
P O Box 79458, Senderwood, 2145
Tel: 011 824 1152
Tel: 011 873 0309
Tel: 011 873 3941
Fax: 011 873 3711

Stewarts & Lloyds Pipes, Fittings & Valves

Cnr. Dan Jacobs & Old Vereeniging Rd,
Alrode
P O Box 79458, Senderwood, 2145
Tel: 011 917 0778
Tel: 011 917 0000
Fax: 011 908 0240

Stewarts & Lloyds Plasma & Profile

154 Tedstone Road, Wadeville, Germiston
P O Box 79458, Senderwood, 2145
Tel: 011 824 1152
Fax: 011 873 3711

Stewarts & Lloyds Pretoria

12 Gompou Street, Eastlynn, Pretoria, 0182
P O Box 14021, Wadeville, 1422
Tel: 012 800 9600
Fax: 012 800 1048

Stewarts & Lloyds Projects

12 Gompou Street, East Lynn, Pretoria, 0182
P O Box 79458, Senderwood 2145
Tel: 012 800 9600
Tel: 012 800 9400
Fax: 012 800 3162

Stewarts & Lloyds Robertville

1157 Leader Ave, Stormill, Ext 5, Robertville
Roodepoort 1709
P O Box 579, Maraisburg, 1700
Tel: 011 474 5335
Fax: 011 474 5338

Stewarts & Lloyds Springs

Cnr. 4th Avenue & 7th Street, Geduld Ext.3,
Springs, 1559
P O Box 6808, Dunswart, 1508
Tel: 011 811 5111
Tel: 011 811 1000
Fax: 011 811 3535

Stewarts & Lloyds Steel & Tube (Wadeville)

Erf 146 Tedstone Road, Wadeville, 1428
P O Box 14021, Wadeville, 1422
Tel: 011 824 1800
Fax: 011 824 1902
Retail: 011 824 1136
Internal Sales: 011 824 3025

Stewarts & Lloyds Vaal

4 Nikkel Dr, Ce6, Vanderbijlpark, 1911
P O Box 3446, Vanderbijlpark, 1900
Tel: 016 981 2038
Fax: 016 981 2050

Stewarts & Lloyds Vereeniging

4 Joubert Street, Duncanville, 1939
P O Box 458, Vereeniging, 1930
Tel: 016 421 3260
Fax: 016 422 5303
Fax: 016 422 7261
Fax: 016 455 4230

Stewarts & Lloyds Wynberg

529, 5th Street, Wynberg, 7800
P O Box 79458, Senderwood, 2145
Tel: 011 321 7900
Fax: 011 321 7911

Limpopo Distributors

Stewarts & Lloyds Polokwane

61 Nelson Mandela Drive, Superbia, Polokwane, 0699
P O Box 39283, Booysens, 2016
Tel: 015 292 2001
Fax: 015 292 6184

Kwa Zulu Natal Distributors

Stewarts & Lloyds Durban

4 Westmead Road, Pinetown, 3610
P O Box 15252, Westmead, 3608
Tel: 031 700 3737
Fax: 031 700 3076

Free State Distributors

Stewarts & Lloyds Bloemfontein

42 Mill Street, Hamilton Industrial Sites 9329
P O Box 512, Bloemfontein, 9300
Tel: 051 434 3951
Fax: 051 434 3950

Mpumalanga Distributors

Stewarts & Lloyds Nelspruit

43 Waterfall Avenue, Riverside Industrial Park,
Nelspruit
P O Box 79458, Senderwood, 2145
Tel: 013 752 8282
Fax: 013 752 7870

Stewarts & Lloyds Witbank

Cnr Van Rensburg & Steve Bantu Biko, Witbank, 1034
P O Box 3836, Witbank, 1035
Tel: 013 692 8425
Fax: 013 692 4483

North West Distributors

Stewarts & Lloyds Brits

Magalies Centre Shop 27,
Cnr Hendrik Verwoerd Ave &
De Boer Street, Brits 0250
Postnet Suite 541, Private Bag X5091
Brits, 0250
Tel: 012 252 0256
Fax: 012 252 0257

Stewarts & Lloyds Klerksdorp

8 Teak Avenue, Klerkindustria,
(Old Industrial Site) Klerksdorp
P O Box 11110, Klerksdorp, 2570
Tel: 018 462 2655
Fax: 018 462 2500

Stewarts & Lloyds Mafikeng

46b Carrington Street, Industrial Sites, Mafikeng, 2745
P O Box 39283, Booysens 2016
Tel: 018 381 5338
Fax: 018 381 6452

Western Cape Distributors

Stewarts & Lloyds Cape Town (Wetton)

29 Plantation Road, Wetton, 7780
29 Plantation Road, Wetton, 7780
Tel: 021 761 9919
Fax: 021 761 9917

Eastern Cape Distributors

Stewarts & Lloyds George

118 Fichat Street, George, 6530
P O Box 79458, Senderwood, 2145
Tel: 044 874 0001
Fax: 044 874 0028

Stewarts & Lloyds Port Elizabeth

14 Burman Rd, Deal Party, Port Elizabeth, 4240
P O Box 3496, North End, 6056
Tel: 041 450 3100
Tel: 041 486 3988
Fax: 041 486 1709

Northern Cape Distributors

Stewarts & Lloyds Kimberley

1 A Mckenzie Street, Kimberley, 8301
P O Box 347, Kimberley, 8300
Tel: 053 832 0550
Fax: 053 832 0553